



Gas Powered Driver Transport Cart



Assembly Instructions

Gas Driver Transport & Display

Part No. 290050

For your Fence Pro™, Ranch Pro™, Multi Pro™ and Multi Pro™ XA Gas Powered Drivers

Carts include the following parts:

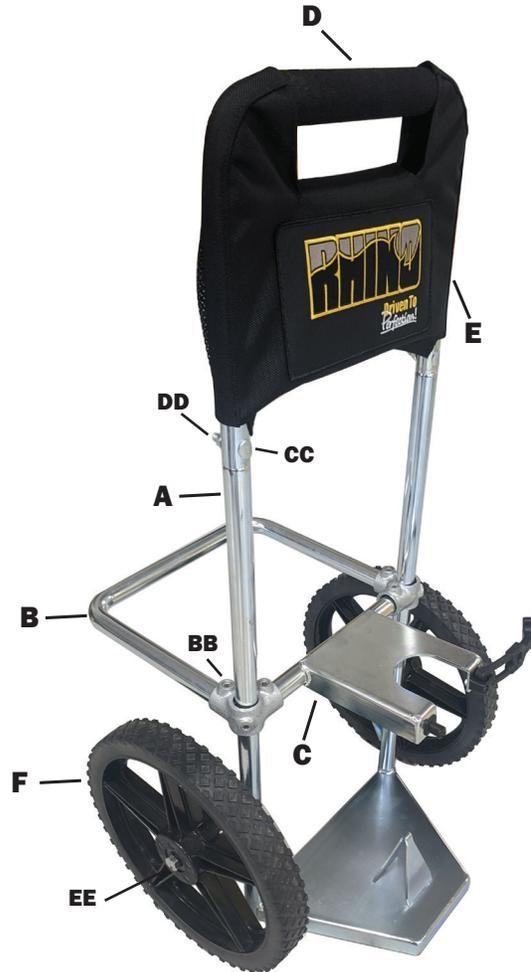

Cart Frame - A



Cart Frame - B



Cradle Bracket - C




Padded Cart Handle - D



Cart Storage Bag - E



Wheels - F



Hardware Included:

- (2) Cart Frame 90° Socket Tee Connectors **BB**
- (2) Cart Frame Bolts 5/16-18 x 1 1/4 **CC**
- (2) Upper Frame Flanged Locknut 5/16-18 **DD**
- (2) 1/2-13 Hex Bolt **EE**



Tools recommended for installation*:

- 1/4" Hex Wrench
- 3/4" Wrench
- 1/2" Wrench


*Installation tools not included



Gas Powered Driver Transport Cart

Assembly Instructions

Attach "B" to "C" using (2) "BB" and 1/4" Hex Wrench

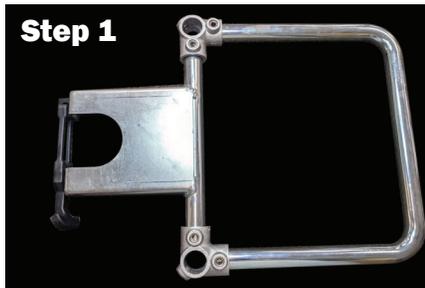

Slide "B and C", from Step 1, over "A" as shown. Position to best height for your post driver, and then tighten (2) "BB" with 1/4" Hex Wrench.



Attach "F", to "A" using "EE" from included hardware. Tighten with 3/4" Wrench.



Attach "D" to "A" using "CC" and "DD" with 1/2" Wrench. "E" will be on the upper handle, but can be removed if needed for cleaning.

Place your post driver on to the cart cradle and make sure the height is correct for your post driver and that all hardware is tightened.

